

DYNAPAC



Part of the Atlas Copco Group

CC384HF

Double drum vibratory rollers



Technical data

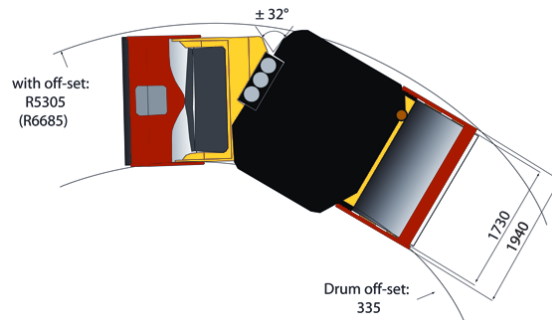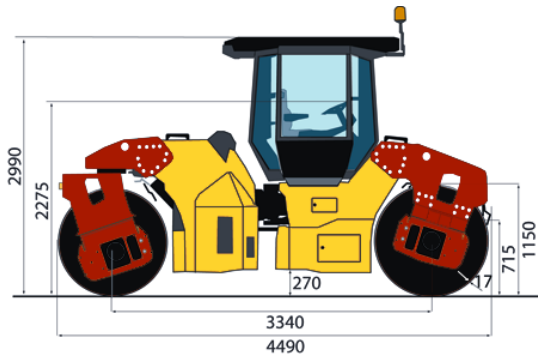

	CC384HF
Masses	
Max. operating mass	10,700 kg
Operating mass (incl. ROPS)	9,400 kg
Module mass (front/rear)	4,700/4,700 kg
Traction	
Speed range	0 -12
Vertical oscillation	±7
Theor. gradeability	37 %
Compaction	
Centrifugal force (high/low amplitude)	90/75 kN
Nominal amplitude (high/low)	0.7/0.3 mm
Static linear load (front/rear)	27.2/27.2 kg/cm
Vibration frequency (high/low amplitude)	48/67 Hz
Water tank (l)	750
Engine	
Manufacturer/Model	Cummins QSB 3.3 T3
Type	Water cooled turbo Diesel with After Cooler
Rated power, SAE J1995	74 kW (99 hp) @ 2,200 rpm
Fuel tank capacity	130 l
Hydraulic system	
Driving	Axial piston pump with variable displacement. Axial piston motors (2) with variable displacement.
Vibration	Axial piston pumps (2) with variable displacement. Axial piston motors (2) with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/Emergency brake	Failsafe multidisc brake in both drums.

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.